


## Scissor Lift Safety Warnings

- Only trained and authorized operators are permitted. Follow the manual.
- Maintain a safe clearance from electrical lines or conductors – the machine is NOT insulated.
- Maintain a minimum 10 feet of clearance up to 50KV. Add one foot for every additional 30KV.
- Prevent unauthorized use of the ground controls while the platform is in use.
- DO NOT manually disengage the brakes or disable safety devices or guardrails.
- NEVER sit or stand on rails; or use stepstools or ladders to extend your reach while on the platform.
- If the tilt alarm sounds, lower and reposition the platform.
- NEVER tie off to an adjacent structure.
- Close and secure the platform entry before operation.
- NEVER exceed the rated capacity.
- Evenly distribute loads on the platform.
- NEVER climb down an elevated beam assembly.
- NEVER use the lift in storms (wind, rain, and lightning).
- Only raise the platform when on level surface.
- Secure tools and loose items so they do not fall.

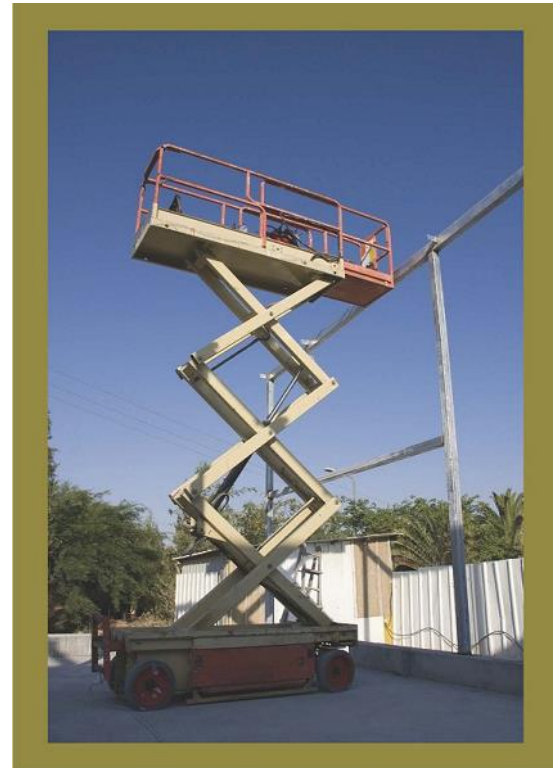

California Code of Regulations Title 8, sections: 3637, 3638, 3642, 3646 and 3648